
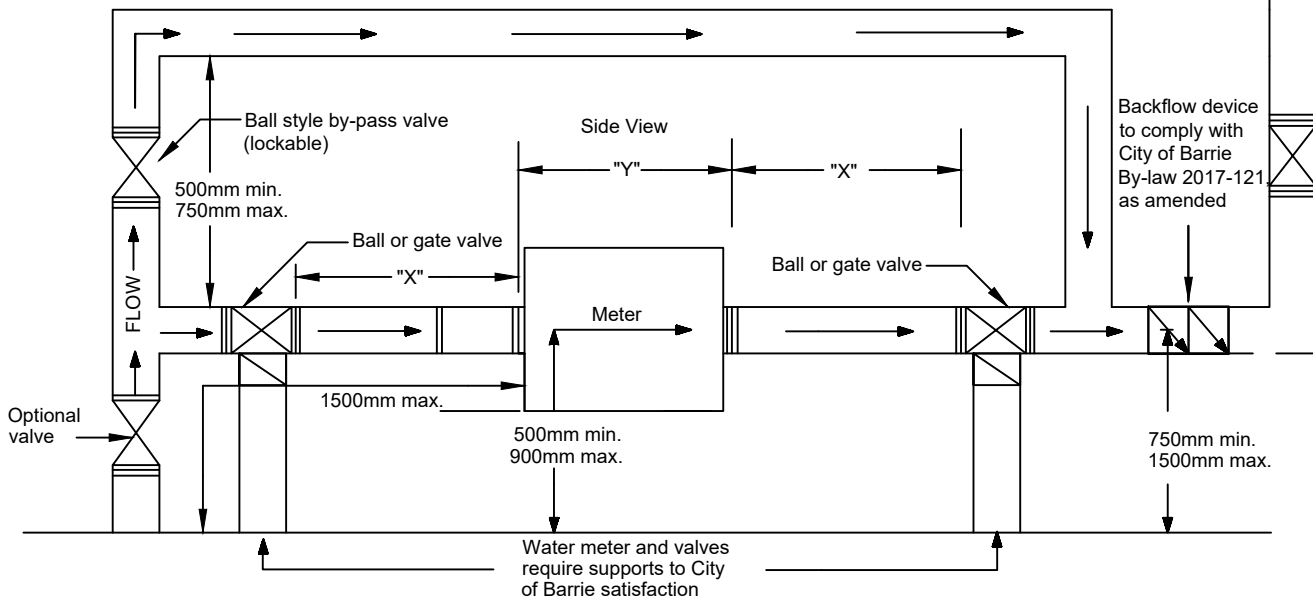


Meter size	"Y"	"X"
38mm(1.5")	330mm	2.5x Pipe dia.
50mm(2")	432mm	
75mm(3")	432mm (17")	
100mm(4")	508mm (20")	
150mm(6")	610mm (24")	

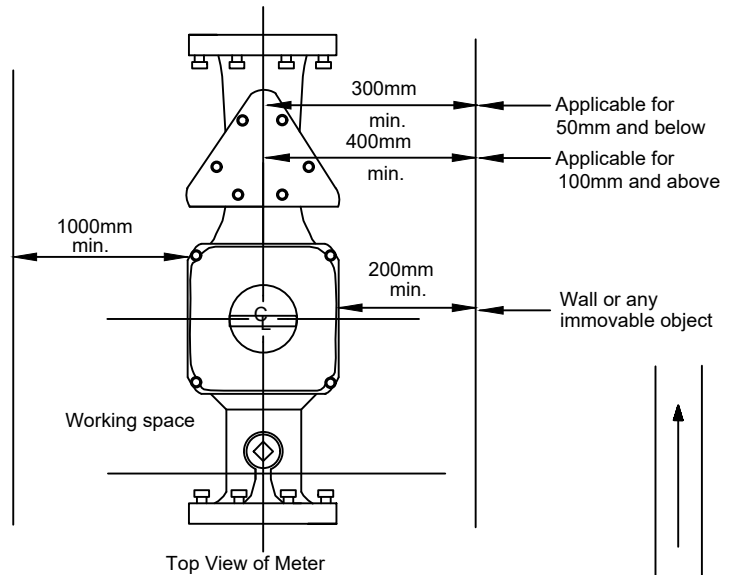

* A key to the mechanical room to be supplied to the City of Barrie for meter reading and maintenance.

NOTES:

1. The diameter of the by-pass line shall match the diameter of the internal plumbing.
2. All materials to be supplied by the contractor except water meters. All meters larger than 50mm are to be supplied and installed by the contractor.
3. Butterfly valves or globe valves shall not be used.
4. All piping between water service entering the building and backflow device must be labeled 'No connection permitted'.
5. Backflow device must be installed within a maximum of 3 meters downstream of the water meter.
6. Meter wire, installed in conduit, to be run from meter location to outside of building at the direction of the Barrie Water Operations representative. Meter wire (22 gauge, 2 conductor, metgray, UV rated) supplied by the City of Barrie.
7. All dimension are in millimeters unless otherwise shown.
8. Contractor to provide flat secure (vertical) surface for the smart point to be mounted on.



Water Meter Installation with By-Pass Assembly

REV No.

5

DATE: APR 2024

SCALE: N.T.S

W533