

LUMINAIRE SPECIFICATIONS

MOUNTING METHOD: PENDANT
 OPTICAL SYSTEM: GLOBE BRUSHED FINISH (GPB)
 IES CLASSIFICATION: TYPE III
 LIGHT SOURCE: LED
 LINE VOLTAGE: 120V
 PAINT: BLACK

OPTIONS:

QUICK DISCONNECT
 TERMINAL BLOCK
 OTHERS -


ARM SPECIFICATIONS:

PAINT: BLACK
 OPTIONS: FINIAL C/W TWISTLOCK RECEPTACLE (PHOTO CELL BY OTHERS)


POLE SPECIFICATIONS:

SECTION: OCTAGONAL
 COLOUR: BLACK ECLIPSE
 FINISH: POLISHED
 POLE TOP: 4 1/2" FL/FL
 POLE BUTT: 10" DIA
 POLE LENGTH: 32'-6"
 APPROX. WEIGHT: 1,565 lbs
 MIN. RACEWAY: 1 1/4" DAI
 OPTIONS: CONSULT WITH MANUFACTURER FOR OPTION OF DUPLEX GFI RECEPTACLE

PTL1 DECORATIVE PLUMBIZER
 C/W TWISTLOCK RECEPTACLE
 AND DECORATIVE CAP
 PAINT: BLACK

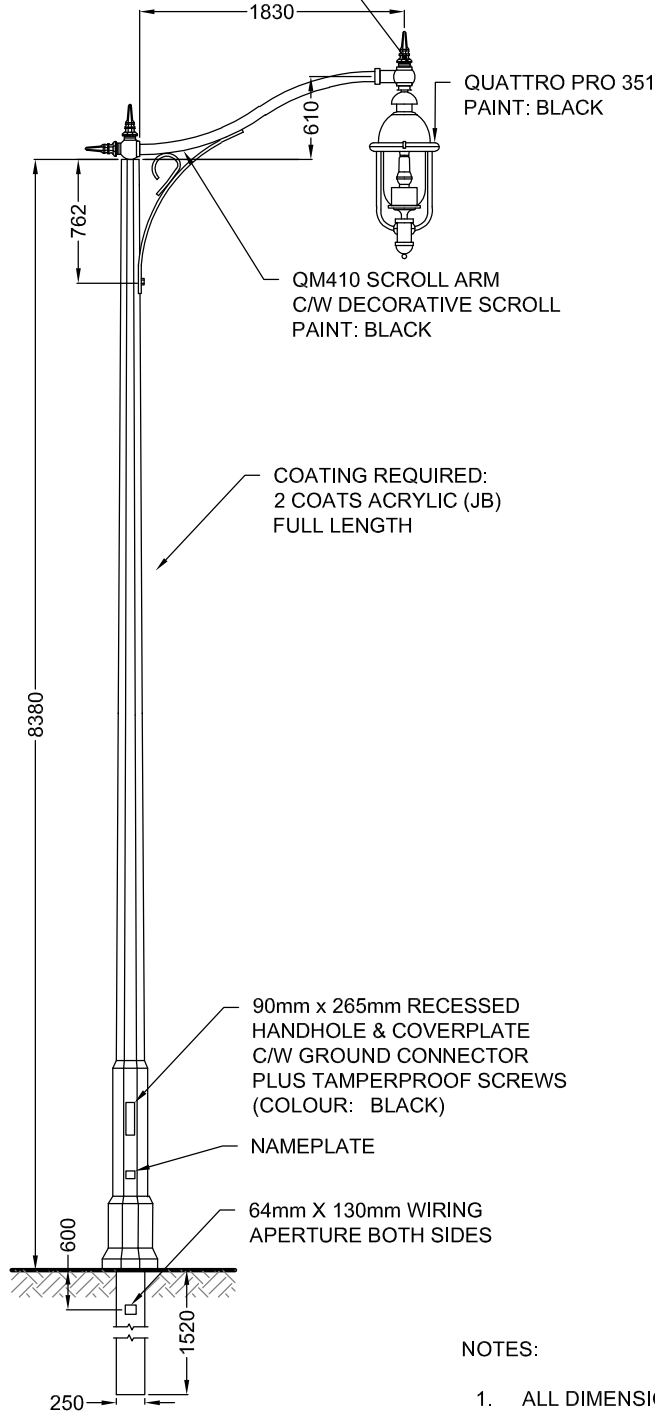

TOP VIEW

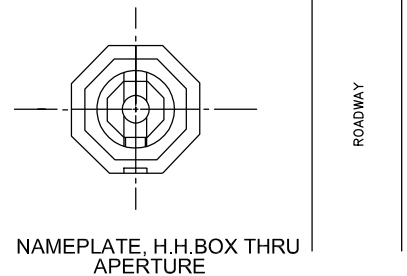

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN

Barrie

STANDARD DETAIL

DECORATIVE CONCRETE POLE,
DIRECT BURIED (8.38m)

REV No. DATE: MAY 2020

2

SCALE: N.T.S.

BSD-828