

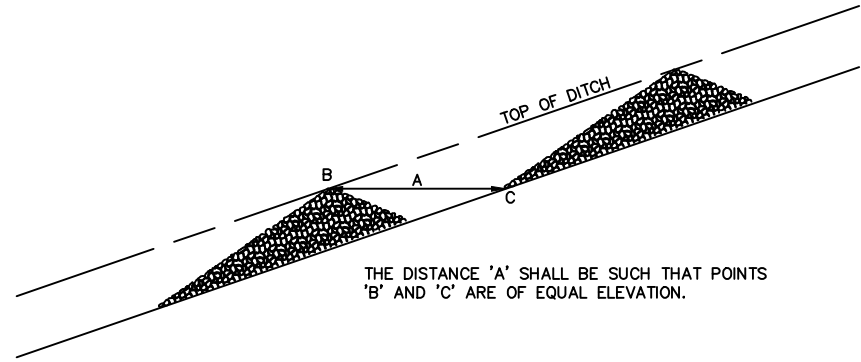


100mm TO 150mm Ø RIP-RAP
WRAPPED IN FILTER CLOTH

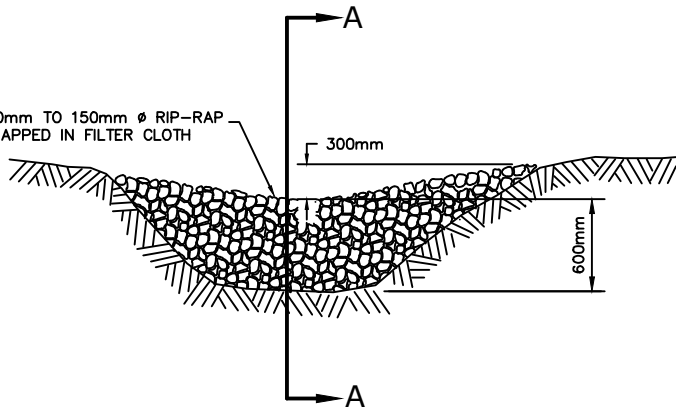

NON-WOVEN GEOTEXTILE TERRAFIX
270R OR APPROVED EQUIVALENT
FILTER MATERIAL OVER FRONT FACE

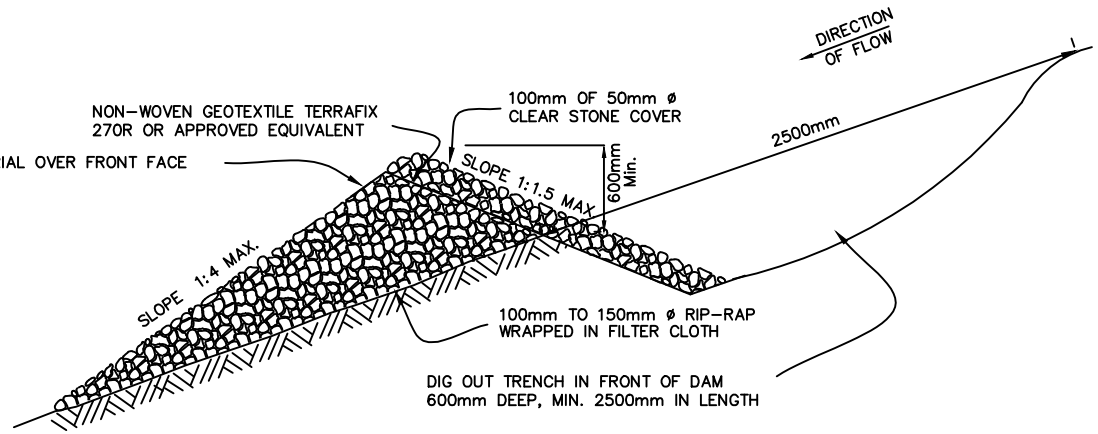

SECTION A - A

NOTES:

1. THIS STANDARD IS TO BE IN ACCORDANCE WITH SCHEDULE "B" OF THE SITE ALTERATION BY-LAW, 'CODE FOR THE DESIGN AND MAINTENANCE OF EROSION AND SEDIMENTATION CONTROL MEASURES' AND IS TO BE ADMINISTERED ACCORDINGLY.
2. SEDIMENT SHALL BE REMOVED AND TRAP RESTORED TO ITS ORIGINAL DIMENSIONS WHEN THE SEDIMENT HAS ACCUMULATED TO 1/2 THE DESIGN DEPTH OF THE TRAP. REMOVED SEDIMENT SHALL BE DEPOSITED IN A SUITABLE AREA IN SUCH A MANNER THAT IT WILL NOT ERODE. THE STRUCTURE SHALL BE INSPECTED AFTER EACH RAIN AND REPAIRS MADE AS NEEDED. CONSTRUCTION OPERATIONS SHALL BE CARRIED OUT IN SUCH A MANNER THAT EROSION AND WATER POLLUTION IS MINIMIZED.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.



Granular Erosion Control Device

REV No.	DATE: APR 2023
3	SCALE: N.T.S.

D786