




PROFILE VIEW

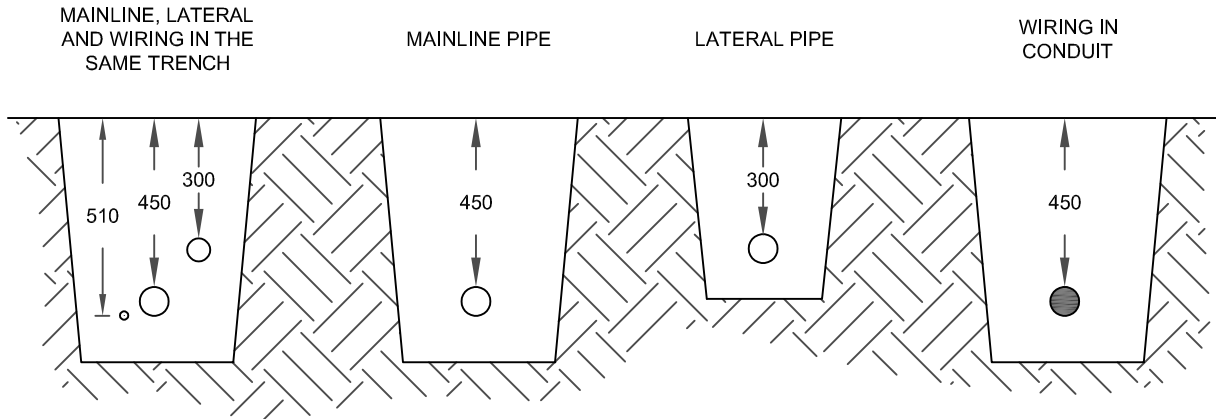



PLAN VIEW



RUN WIRING BENEATH AND BESIDE MAINLINE, TAPE AND BUNDLE AT 3.0m INTERVALS.



ADD SOLVENT WELDED PLASTIC PIPING TO BE SNAKED IN TRENCH AS SHOWN.



TIE A 600mm LOOP IN ALL WIRING AT CHANGES OF DIRECTION OF 30 DEGREES OR GREATER. UNTIE AFTER ALL CONNECTIONS HAVE BEEN MADE

1. SLEEVE BELOW ALL HARD-SCAPE ELEMENTS WITH CLASS 200 PVC TWICE THE DIAMETER OF THE PIPE OR WIRE BUNDLE WITHIN.
2. DO NOT SCALE THIS DRAWING.



PIPE WIRE TRENCHING FOR IRRIGATION

REV No. DATE: APR 2023

2

SCALE: N.T.S.

P1285