
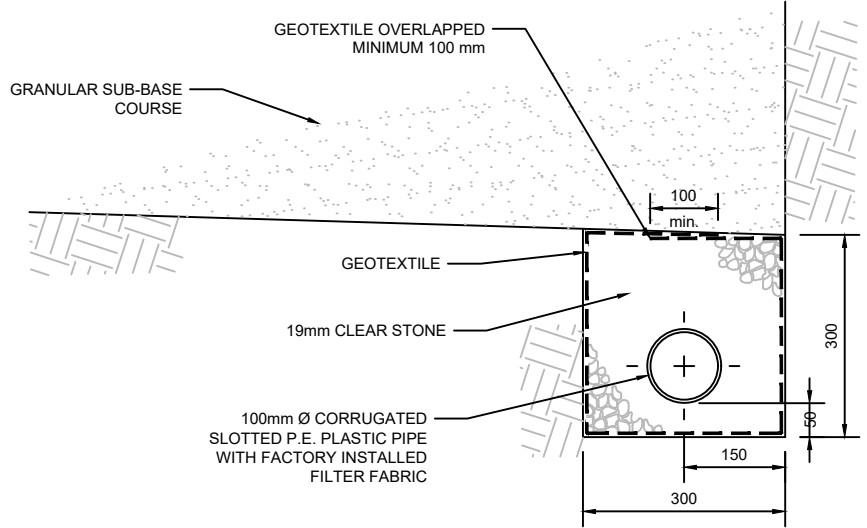


TYPE 'A'
TYPICAL

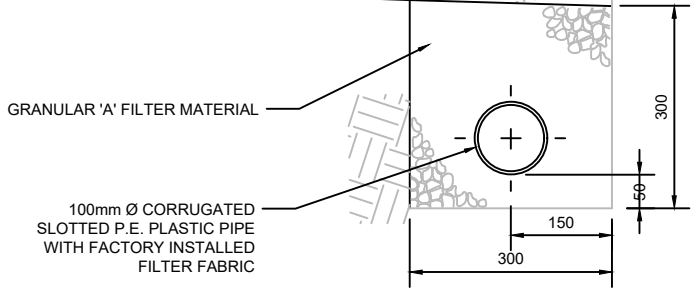

TYPE 'B'
HIGH GROUND WATER

NOTES:

1. ALL CONNECTIONS TO BE MADE ON THE UPSTREAM SIDE OF ALL CATCH BASINS. MORTARED INSIDE AND OUTSIDE.
2. SUBDRAINS TO BE PLUGGED AT THE HIGH END WITH A MANUFACTURED PLUG.
3. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE SHOWN.
4. FOR SELECTION OF TYPE 'A' AND TYPE 'B' SUBDRAINS REFER TO CITY OF BARRIE TRANSPORTATION DESIGN MANUAL.
5. TYPE 'B' : THE SUBDRAIN TRENCH SHALL BE LINED WITH CLASS II, NON-WOVEN GEOTEXTILE, WITH AN F.D.S. OF 75-150 µm AND A MINIMUM THICKNESS OF 1 mm.



ROAD SUBDRAIN

REV No.	DATE: APR 2023
2	SCALE: N.T.S.

R315