

Wellington D2 Neighbourhood Reconstruction Public Information Meeting August 26th, 2026



Welcome!

The purpose of this Public Information Centre is to:

- Present the project scope, schedule and details to the public
- Describe the proposed construction, including staging and traffic control
- Identify potential constraints or construction issues
- If you have questions or concerns, City of Barrie staff are available to discuss the project with you

Jeff Henry, C.E.T

City of Barrie

Engineering Project Manager, Linear Infrastructures Projects

705-739-4220 x 4592

Jeff.Henry@Barrie.ca

Project Limits

- Amelia Street will be closed from Dundonald St. to Duckworth St.
- Duckworth St. will be closed from Highland Ave. to Eugenia St.
- Dundonald St. will be closed from Eugenia St. to Collier St.

There will be access for local traffic only.



KEMPENFELT RAY

Schedule

Design:

2025-2026

Utility
Relocations:

2026

Construction:

2027-2028



Proposed Work

Road Reconstruction

Watermain and Service Replacement

Sanitary Sewer and Lateral Replacement

Storm Sewer Replacement

Sidewalk Replacement/Installation

Street Lighting Improvements



Design Considerations

Proposed 1.8m sidewalk 1.0m off curb on south side of Amelia Street from Dundonald Street to Duckworth Street

Proposed 1.8m sidewalk curb face on the south/west side of Dundonald Street from Theresa Street to 30m north

Proposed 1.8m sidewalk curb face on west side of Duckworth Street from Amelia Street to Eugenia Street

Proposed 1.8m sidewalk curb face on the south/west side of Dundonald Street from Collier Street to Theresa Street

Proposed 1.8m sidewalk curb face on west side of Duckworth Street from Amelia Street to Eugenia Street

The City will make best efforts to protect boulevard trees, however some may require removal to facilitate the work.

Traffic During Construction



The construction area will be closed with access for local traffic only



There will be no through traffic



Driveway access will be maintained




Pedestrian Access will be maintained





There will be additional traffic associated with construction



Transit Routes will continue

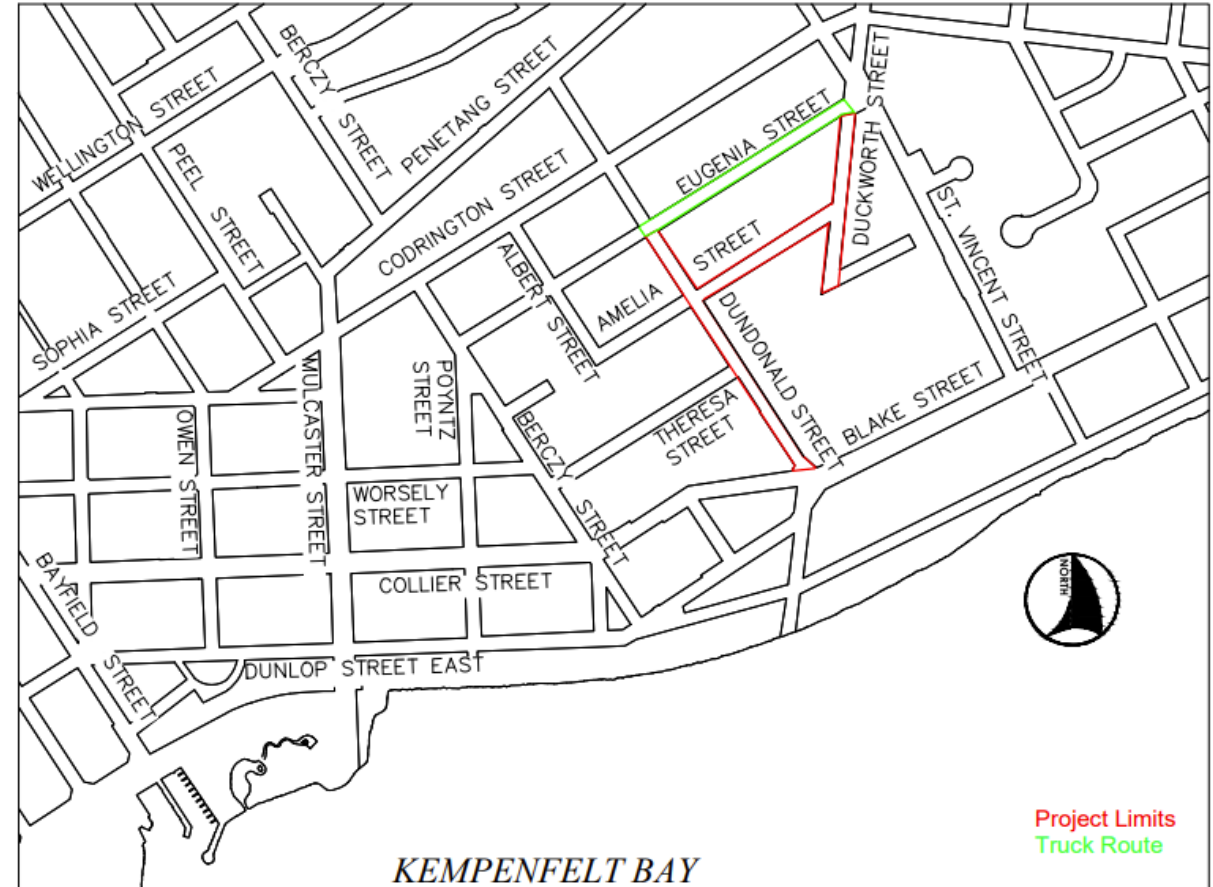

Section Plans

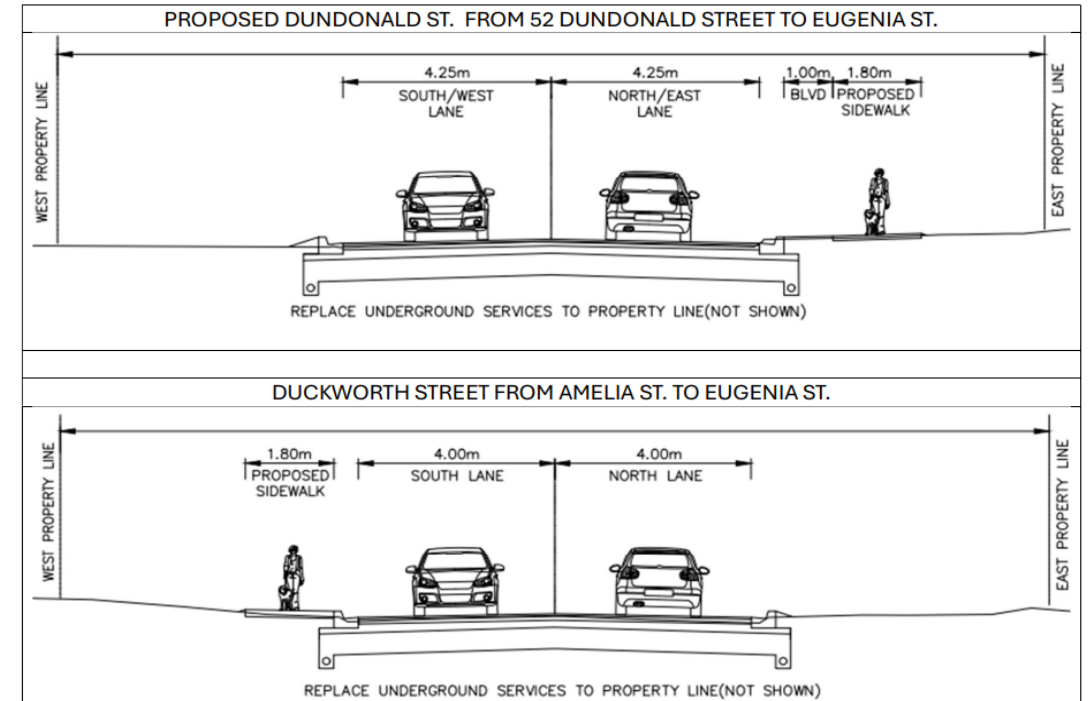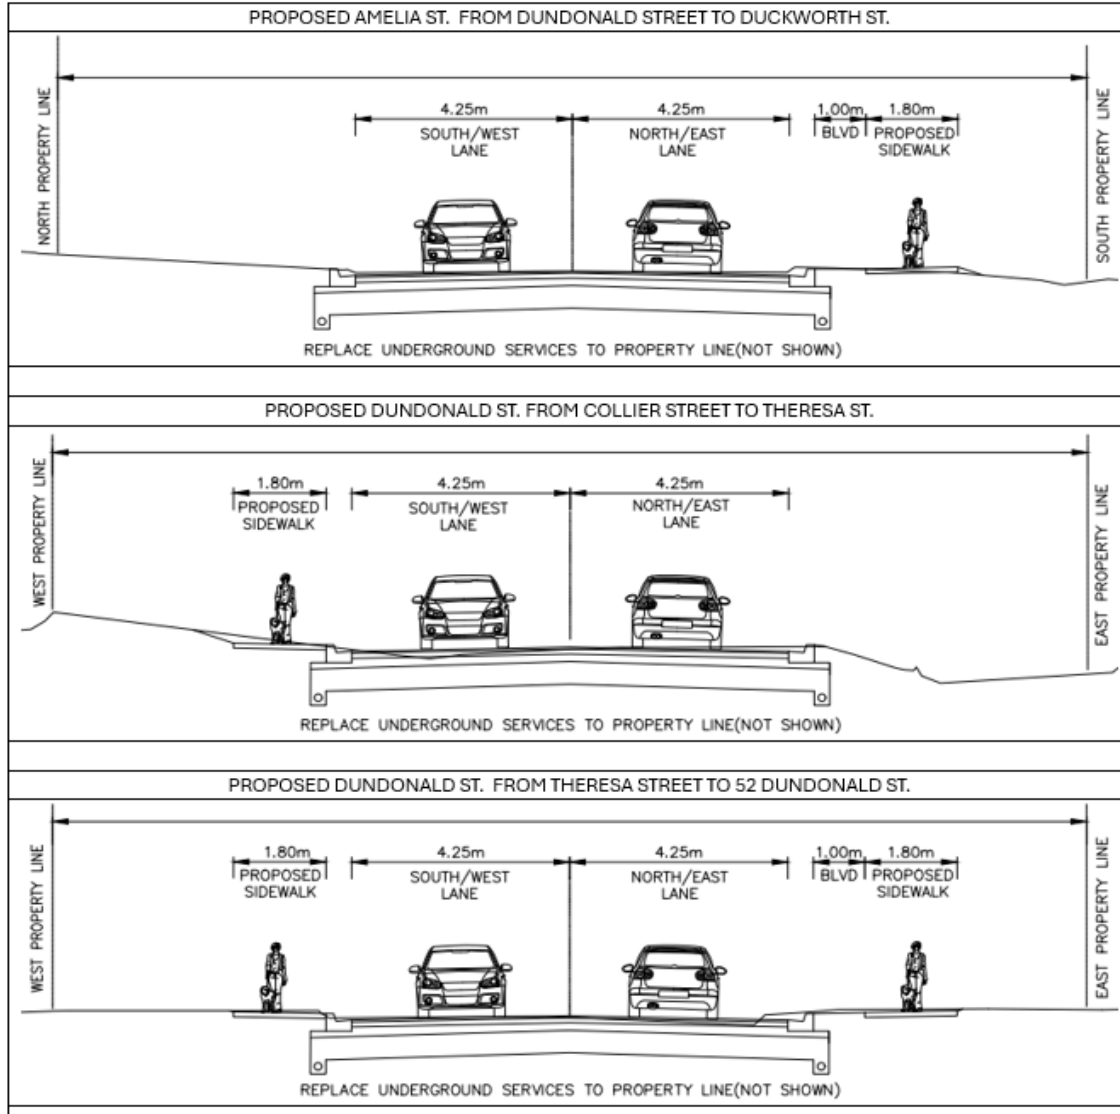

During Construction

- A pre-construction notice will be circulated prior to the start of construction.
- Emergency access and garbage collection will be maintained at all times.
- Garbage, Recycling and Organics curbside collection will be facilitated by the Contractor. If you live in this area, your bins should have your address clearly marked on them and will need to be placed out to the curb in front of your home before 7am on collection day.
- We don't anticipate any disruption to sewer services. However, a brief interruption of drinking water may be needed.
- The contractor is responsible to provide dust control and to clear construction debris from the roadway. The City will take all reasonable measures to ensure dust control is in place and debris is kept off the road during construction, however, please expect minimal amounts of dust and debris.

