

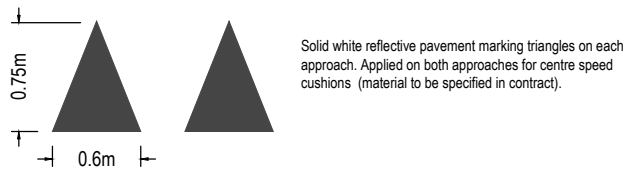


General Layout			
Road width (m)	No. of cushions	Dim. (m)	
		B	C
8.0	3	0.75	0.40
9.0	3	1.10	0.55
10.0	4	0.60	0.40
11.0	4	1.00	0.46

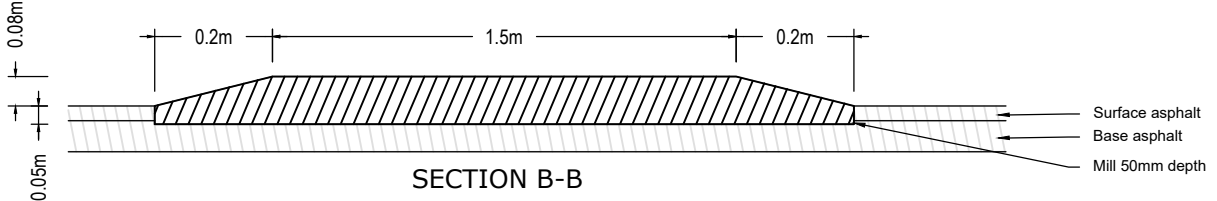

Notes:

1. Reinstated hot mix asphalt layer configuration shall match existing.
2. Speed cushions to be used only on roads classified as local streets and on a case-by-case basis on low volume minor collector streets, subject to City approval.
3. All edges to be routed and sealed with hot rubberized asphalt joint sealing compound.
4. Treat all cut faces and existing asphalt with tack coat prior to placing asphalt.
5. Traffic signs to be installed as per applicable Ontario Traffic Manual.

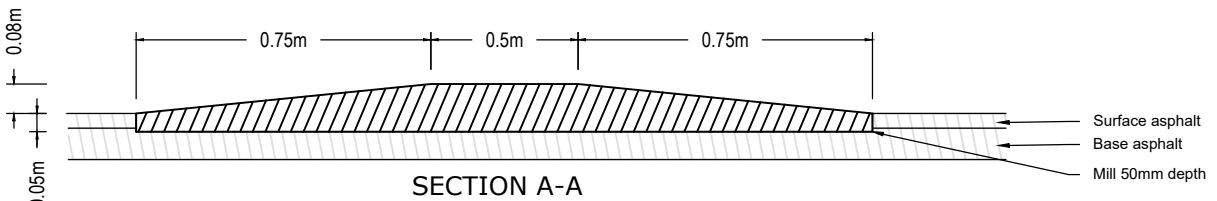

Speed Cushions

REV No.	DATE: February 2026
1	SCALE: N.T.S.
R373	