# Results summary

| Luminaire Schedule | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| Tag | Symbol | Qty | Description | Lum. Watts | Lum. Lumens | LLF | Arrangement | Filename |
| A | | 6 | TRV-36L-80-5K7-3 | 85.47 | 9307 | 0.900 | SINGLE | TRV-36L-80-5K7-3-UNV.ies |
| B | | 29 | PA7R-CL5-12L-020-4K7 | 21.75 | 2296 | 0.900 | SINGLE | PA7R-CL5-12L-020-4K7.IES |

| Calculation Summary | | | | | | | |
|---|---|---|---|---|---|---|---|
| Label | CalcType | Units | Avg | Max | Min | Avg/Min | Max/Min |
| Main area | Illuminance | Fc | 6.01 | 9.0 | 2.0 | 3.01 | 4.50 |
| Surrounding area | Illuminance | Fc | 2.45 | 20.0 | 0.0 | N.A. | N.A. |
| Surrounding area_2 | Illuminance | Fc | 0.12 | 0.9 | 0.0 | N.A. | N.A. |
| Surrounding area_3 | Illuminance | Fc | 0.02 | 0.2 | 0.0 | N.A. | N.A. |
| Walkway (Orange)_Planar | Illuminance | Fc | 3.23 | 14.9 | 0.0 | N.A. | N.A. |
| Walkway - Pink (Top)_Building_18 | Illuminance | Fc | 3.58 | 15.0 | 0.1 | 35.80 | 150.00 |

Note:

Calculation Grid @ Ground Level (5' x 5' Grid Spacing)

Fixture mounting height is mentioned in each luminaire label.

Traverse



Pavilion Round

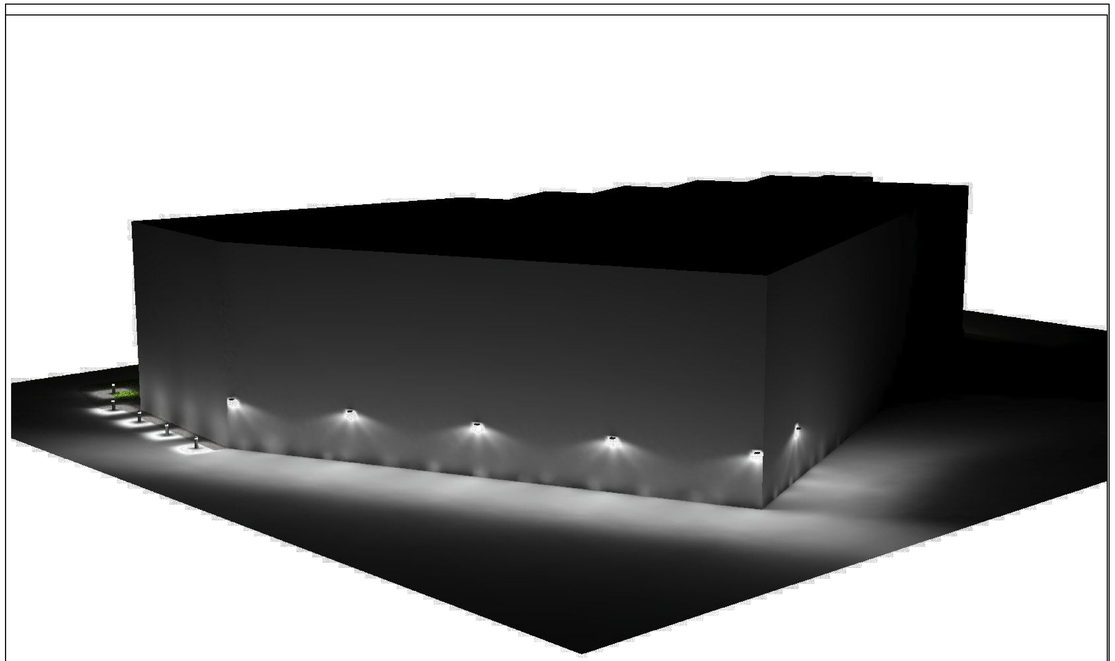

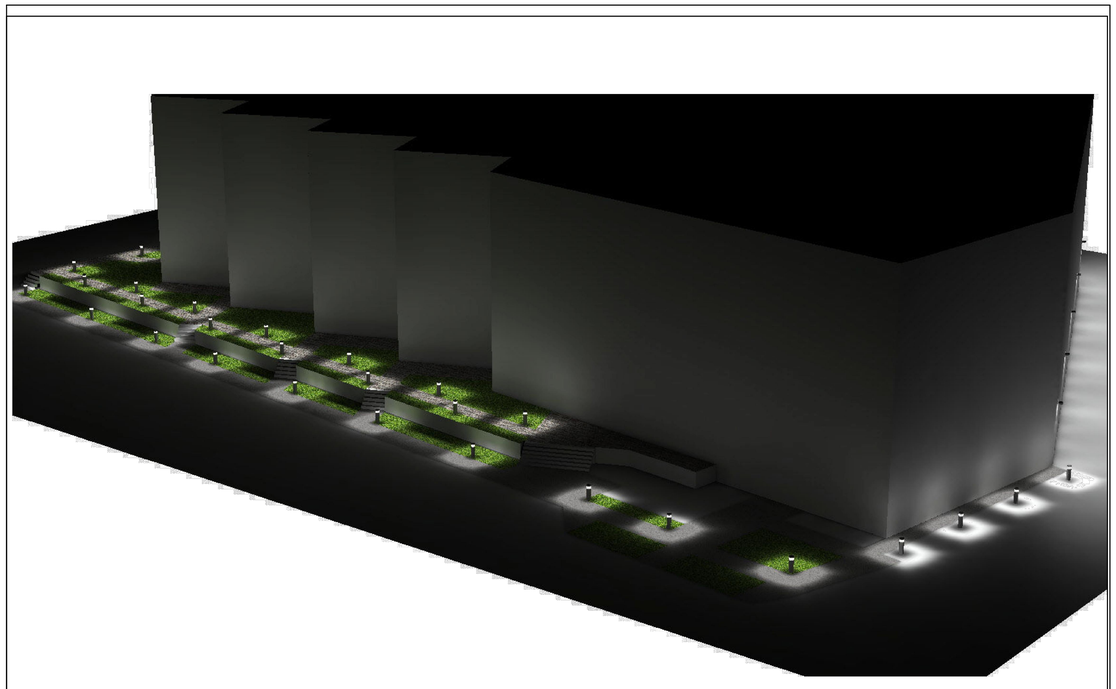

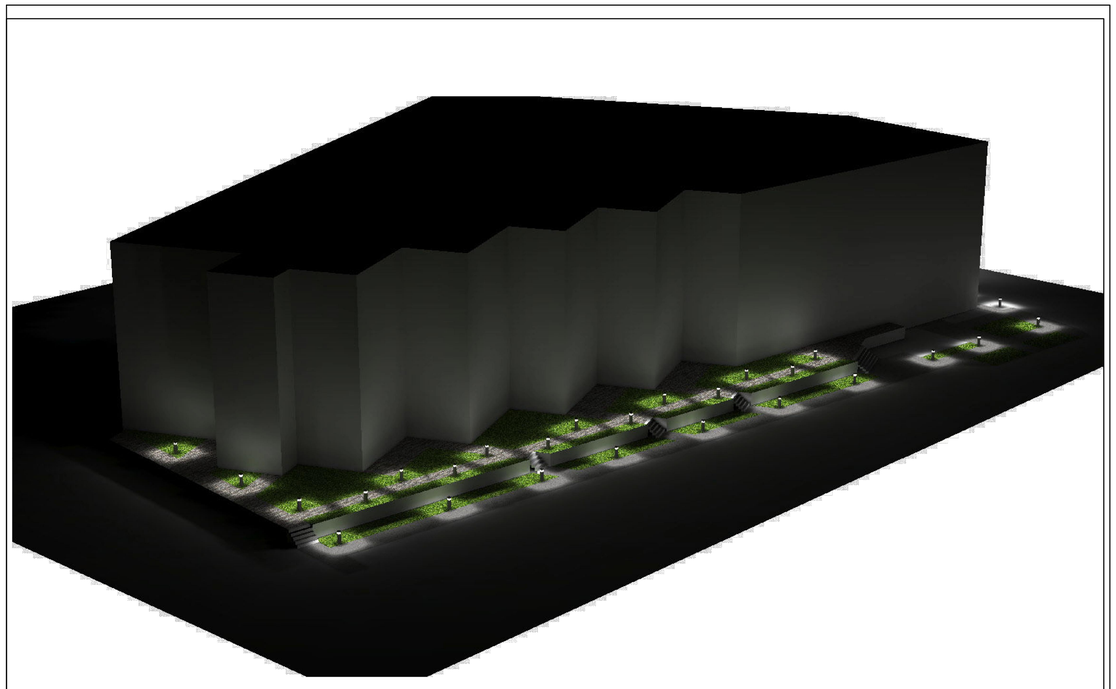

| | | |
|---|---|---|
| 2 | 2021 09 09 | ISSUED FOR SITE PLAN APPROVAL |
| 1 | 2019 04 02 | ISSUED FOR SITE PLAN APPROVAL |

ALL DRAWINGS, SPECIFICATIONS AND RELATED DOCUMENTS ARE THE COPYRIGHT PROPERTY OF THE ARCHITECT AND MUST BE RETURNED UPON REQUEST. REPRODUCTION OF DRAWINGS, SPECIFICATIONS AND RELATED DOCUMENTS IN PART OR WHOLE IS FORBIDDEN WITHOUT THE ARCHITECT'S WRITTEN PERMISSION.

CONTRACTOR MUST CHECK AND VERIFY ALL DIMENSIONS ON THE JOB.

genuine engineering co. mechanical + electrical

GENUINE ENGINEERING CO.
Ali Ketabchian
ali.ketabchian@GenuineEngineeringCo.com
416.897.5767

***THE GEORGIAN***
APARTMENTS

**290-302 GEORGIAN DRIVE, BARRIE**

| SCALE | DATE |
|---|---|
| NOT TO SCALE | 2018 12 21 |

SHEET NAME

**SITE LIGHTING PHOTOMETRY**

| PROJECT NO. | SHEET NO. |
|---|---|
| 18-107 | SPA-E3 |